

MG Bollard

V416201

Description

The MG Bollard is a heavy duty bollard ideal for illuminating walkways.

Environment

Outdoor

Installation

Designed to be base mounted

Application

For use in parks, walkways and other similar applications.



General Data

Voltage	AC220-240V 50-60Hz
Power Factor	>0.9
Light Source	LED
CCT	3500K
LED Lifetime	40,000hrs
Operating temp	-20°C to 30°C
Materials	Die cast aluminium housing charcoal finish Polycarbonate diffuser


Light Data

Lumens per Watt	160lm/W
Light Source	LED
CRI	80
Distribution	120°

Product Variants

Product Code	System Power (W)	System efficacy (lm/W)	Lumens (lm)	CCT (K)	Length mm	Width mm	Height mm
V416201	12W	60	770	3500K	150	150	800

Dimensions

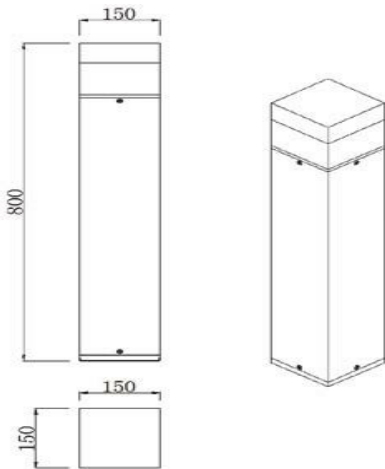

Options

OPTION	CODE
DSI Digital Dimmable	/DD
DALI and Switch Dimmable	/DL